



WORLD CLASS.

The Power Behind Performance

Automotive Starter Batteries

The Road to Pure Performance





The Power Behind Performance

For People Who Put Performance Above Everything Else.

For over 90 years, we have made only two things: ***Batteries. And History.***

With the diversity of today's automotive world, the battery you choose has to have a worldwide pedigree.

Crown Battery's sales offices and distribution centers operate across North America – with authorized dealers and sales agents in more than 55 countries throughout the world. And we are proud that these are all technically savvy battery people. Not just salesmen. But experts who can answer all your questions, and guide you through testing products, solve problems, and get you the right product for your specific application(s).

As the worldwide demand for high-performance batteries continues to grow, Crown Battery's global role is growing, too – not only as a supplier of quality batteries, but also as a prime innovator of lead-acid battery technologies that provide "power" opportunities all over the world.

Maybe it's time you took a closer look at Crown. We're ready to talk. Anytime.



51-XD



24-XD



65-XD

- **CleanFit™ Maintenance Free Cover**

The CleanFit™ cover design affords clean, maintenance-free operation, ease of fitment – and a durable recessed handle for safe handling and installation.

- **Innovative Terminals**

Heavy duty terminals resist corrosion and optimize durability and efficiency in tough operating environments.

- **PosiWrap™ Envelope Separators**

PosiWrap™ separators reduce maintenance and prevent failure due to short-circuiting and plate shedding, ensuring reliability and durability.

- **SolidCast™ Plate Construction**

Crown's full frame SolidCast™ grids utilize uniform wire thickness across the grid structure to hold and retain active materials for longer life and better reliability.

- **Tough Connectors**

Thicker SolidCast™ COS, TTP and Terminal Post connectors for premium performance and reliability.



34/78-XD



78-XD



47-XD





48-XD



Automotive/Light Truck Starter Battery Specifications

BCI Group	Model Description	Item Number	Electrical Capacity			Inches			Millimeters			Weight		Product Footnotes
			Volts	CCA Rating	CA Rating	L	W	H	L	W	H	Lbs	Kgs	
MAINTENANCE FREE DUAL TERMINAL AUTOMOTIVE BATTERIES														
34/78	34/78-XD	A3478XD	12	770	960	10.24	7.05	8.04	260	179	204	40.5	18.4	CHJM
	34/78-HD	A3478HD	12	550	690	10.24	7.05	7.87	260	179	200	33.0	15.1	CHJM
26/70	26/70-HD	A2670HD	12	500	625	8.19	7.05	7.87	208	179	200	27.5	12.6	CHJM
MAINTENANCE FREE AUTOMOTIVE BATTERIES														
24	24-XD	A24XD	12	675	840	10.25	6.75	9.00	260	171	229	40.5	18.4	AHJM
	24-HD	A24HD	12	550	690	10.25	6.75	9.00	260	171	229	37.5	17.0	AHJM
24F	24F-XD	A24FXD	12	675	840	10.69	6.75	9.00	272	171	229	40.5	18.4	AHJM
	24F-HD	A24FHD	12	550	690	10.69	6.75	9.00	272	171	229	37.5	17.0	AHJM
25	25-HD	A25HD	12	500	625	9.06	6.77	8.66	230	172	220	32.5	14.8	AHJM
26	26-HD	A26HD	12	520	650	8.19	6.77	7.87	208	172	200	27.0	12.3	AHJM
26R	26R-HD	A26RHD	12	520	650	8.19	6.77	7.87	208	172	200	27.0	12.3	AHJM
27	27-XD	A27XD	12	710	890	12.00	6.75	9.00	305	171	229	45.5	20.6	AIM
27F	27F-XD	A27FXD	12	710	890	12.50	6.75	9.00	318	171	229	45.5	20.6	AIM
34	34-XD	A34XD	12	625	780	10.25	6.75	8.19	260	171	208	37.0	16.8	AHJM
	34-HD	A34HD	12	525	655	10.25	6.77	7.87	260	172	200	30.0	13.8	AHJM
35	35-XD	A35XD	12	550	685	9.13	6.75	8.63	232	171	219	34.5	15.6	AIM
36R	36R-HD	A36RHD	12	650	810	10.25	7.25	7.88	260	184	200	37.5	17.0	AIM
40R	40R-HD	A40RHD	12	590	740	10.81	6.94	6.77	275	176	172	33.0	15.0	AHJM
45	45-HD	A45HD	12	500	625	9.28	5.50	8.88	236	140	226	28.5	12.9	AIM
47 / L2	47-XD	A47XD	12	600	750	9.63	6.88	7.50	245	175	191	33.0	15.0	AHJMV
48 / L3	48-XD	A48XD	12	730	910	11.00	6.88	7.50	279	175	191	40.0	18.1	AHJMV
49 / L5	49-HD	A49HD	12	850	1060	13.94	6.88	7.50	354	174	190	48.0	21.9	AHJMV
51	51-XD	A51XD	12	500	625	9.32	4.94	8.66	237	125	220	29.0	13.2	AIM
51R	51R-XD	A51RXD	12	500	625	9.32	4.94	8.66	237	125	220	29.0	13.2	AIM
55	55-HD	A55HD	12	525	655	8.50	6.01	8.45	216	153	215	32.0	14.5	AIJM
58	58-HD	A58HD	12	520	650	9.29	7.17	7.01	236	182	178	28.5	13.1	AHJM
58R	58R-HD	A58RHD	12	520	650	9.29	7.17	7.01	236	182	178	28.5	13.1	AHJM
59	59-HD	A59HD	12	590	740	10.13	7.50	7.63	257	191	194	34.0	15.4	AIJM
65	65-XD	A65XD	12	850	1060	12.06	7.44	7.56	306	189	192	46.5	21.1	AIJM
	65-HD	A65HD	12	650	810	12.06	7.44	7.56	306	189	192	39.5	17.9	AIJM
70	70-HD	A70HD	12	520	650	8.19	7.05	7.09	208	179	180	27.0	12.4	EHJM
75	75-XD	A75XD	12	625	780	9.06	7.05	7.25	230	179	184	34.5	15.6	EHJM
	75-HD	A75HD	12	525	655	9.06	7.05	7.09	230	179	180	31.0	14.1	EHJM
78	78-XD	A78XD	12	770	960	10.19	7.05	7.25	259	179	184	40.0	18.1	EHJM
	78-HD	A78HD	12	600	750	10.24	7.05	7.09	260	179	180	32.5	14.8	EHJM
79	79-HD	A79HD	12	840	1050	12.25	7.05	7.38	311	179	187	41.5	18.8	EHM
86	86-HD	A86HD	12	530	660	9.06	6.77	7.87	230	172	200	29.5	13.4	AHJM
94R / L4	94R-HD	A94RHD	12	750	935	12.40	6.85	7.48	315	174	190	43.0	19.6	AHJM
96R	96R-HD	A96RHD	12	600	750	9.49	6.85	6.89	241	174	175	31.5	14.4	AHJM
121R	121R-HD	A121RHD	12	550	685	7.87	6.77	8.66	200	172	220	30.0	13.6	AHJM
124R	124R-HD	A124RHD	12	670	835	10.12	6.77	8.66	257	172	220	38.0	17.3	AHJM

Specifications effective as of October 1, 2017.

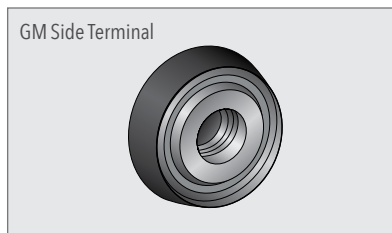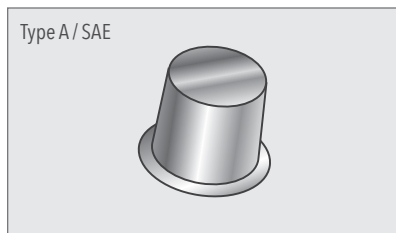

FOOTNOTES KEY:

- | | |
|--|--|
| A = SAE Automotive Top Terminal | I = Cover with Raised / POD Vent |
| C = Dual Terminal SAE / GM Side | J = Includes Handle |
| E = GM Side Terminal | M = Maintenance-Free Calcium Alloy Construction |
| H = CleanFit™ Flush Manifold Vented Cover | V = Venting Elbow Supplied Upon Request |

Because Crown Battery is continually improving its products, specifications are subject to change without notice. The most current product information is listed on the seller's website at www.crownbattery.com. The information included on the website may amend and supersede the information in this brochure. Purchasers are encouraged to visit the website to view the most current information

The Power Behind Performance



1445 Majestic Drive | P.O. Box 990
 Fremont, OH 43420-0990 USA
 +1-419-334-7181 | Fax +1-419-334-7124
www.crownbattery.com
commercial@crownbattery.com